

SMD QUARTZ CRYSTAL

SERIES SMD03025/4 (4 pad housing 3.2x2.5mm)

FEATURES

- + Cheapest available SMD-Crystal
- + High reliability for low cost
- + Extended temperature range to -40/+125°C available
- + LRT-TECHNOLOGY Inside (LRT is Low ESR Resonator-Technology)^[1]
- + Our top quality promise / depth of production:
 - Only use of crystal blanks from our in-house production
 - Excellent product features guaranteed by multiple 100% tests
 - 100% quality monitoring from crystal raw material to the end product



GENERAL DATA

PB FREE / ROHS COMPLIANT

PARAMETERS	PRODUCT FEATURES AND CONDITIONS
SMD-CRYSTAL SERIES	SMD03025/4
NUMBER OF SOLDER PADS	4
FREQUENCY RANGE	8.0 ~ 285 MHz Fundamental
FREQUENCY TOLERANCES AT 25°C	±10 ppm ~ ±50 ppm
LOAD CAPACITANCE (C _L)	Series or 6 pF ~ 50 pF
WORKING TEMPERATURE RANGES	0/+50°C ~ -40/+125°C
TEMPERATURE STABILITY	±8 ppm ~ ±50 ppm (see FREQUENCY STABILITY VS. TEMPERATURE table)
SHUNT CAPACITANCE (C ₀)	2 pF max.
DRIVE LEVEL	100 µW typ. / 200 µW max. (500 µW available on request)
AGING	±2 ppm per year standard (±10 ppm max. after 10 years available on request)
INSULATION RESISTANCE	>500 MΩ DC/100V ±10%
STORAGE TEMPERATURE	-55°/+125°C
PRODUCT WEIGHT	0.027 g
MSL LEVEL	1
DELIVERY FORM	Tape and Reel (3.000 pcs per reel)
SELECT YOUR REQUIRED CRYSTAL (PRODUCT CONFIGURATOR)	REQUEST CRYSTAL SAMPLES (SAMPLE CONFIGURATOR)

Note:

1. LRT is optimized low ESR resonator design for fast and secure oscillation start-up
2. The reference temperature for all specified values and tests is +25°C.
3. Do not use cleaning baths operating at ultrasonic frequencies or ultrasonic welding processes.

FREQUENCY STABILITY VS. TEMPERATURE

	±8ppm	±10ppm	±15ppm	±20ppm	±30ppm	±50ppm
0°/+50°C	+	+	+	+	+	+
-10°/+60°C		+	+	+	+	+
0°/+70°C		+	+	+	+	+
-20°/+70°C		+	+	+	+	+
-40°/+85°C			+	+	+	+
-40°/+105°C					+	+
-40°/+125°C						+


RESONANCE RESISTANCE

FREQUENCY IN MHz	VIBRATION MODE	ESR MAX. IN Ω
<12 MHz	Fundamental	500
12.0 ~ 20.0 MHz	Fundamental	70
20.0 ~ 40.0 MHz	Fundamental	40
>40.0 MHz	Fundamental	25


LIST OF STANDARD FREQUENCIES

8.000 MHz	10.000 MHz	11.0592 MHz	12.000 MHz	12.288 MHz	12.800 MHz	13.000 MHz	13.346 MHz
13.52127 MHz	13.560 MHz	13.824 MHz	14.318 MHz	14.31818 MHz	14.7456 MHz	16.000 MHz	16.384 MHz
16.9344 MHz	18.432 MHz	19.200 MHz	20.000 MHz	20.736 MHz	22.1184 MHz	22.5792 MHz	24.000 MHz
24.576 MHz	25.000 MHz	25.000625 MHz	25.00075 MHz	26.000 MHz	27.000 MHz	27.120 MHz	27.600 MHz
28.6363 MHz	29.4912 MHz	30.000 MHz	32.000 MHz	32.768 MHz	33.000 MHz	36.000 MHz	36.864 MHz
37.400 MHz	38.400 MHz	40.000 MHz	48.000 MHz	49.152 MHz	50.000 MHz	52.000 MHz	54.000 MHz
55.46667 MHz	62.400 MHz	125.000 MHz	200.000 MHz				


DIMENSIONS

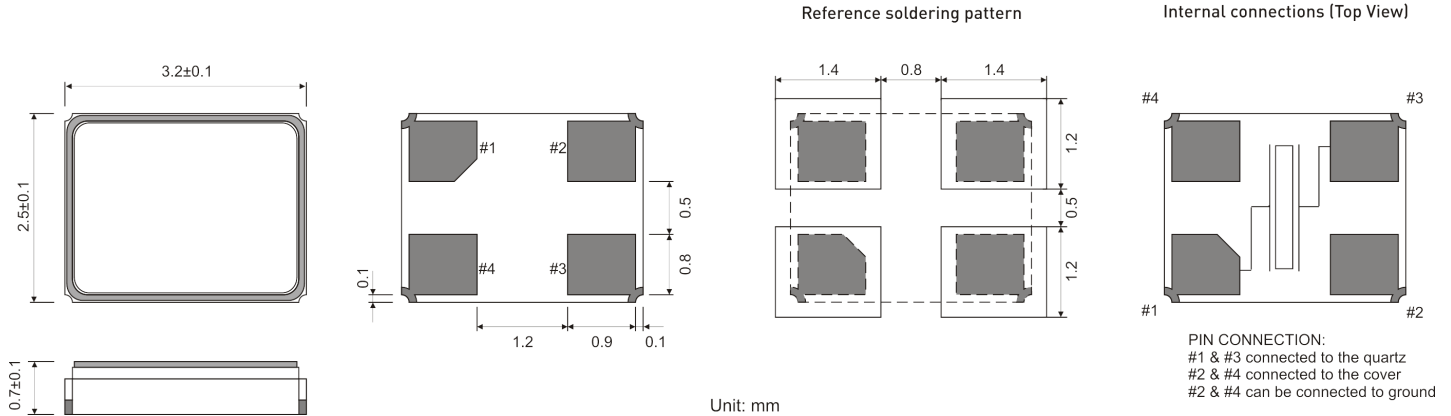


REEL SPECIFICATION

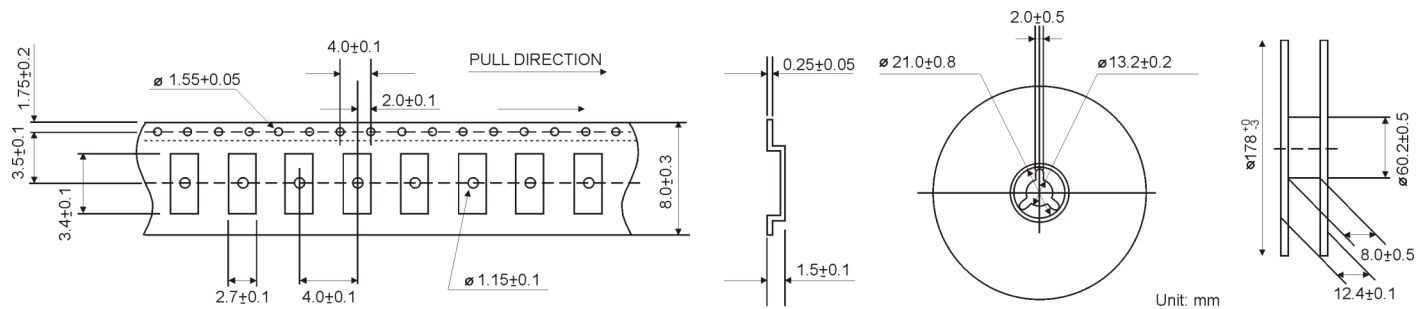

REFLOW SOLDER PROFILE

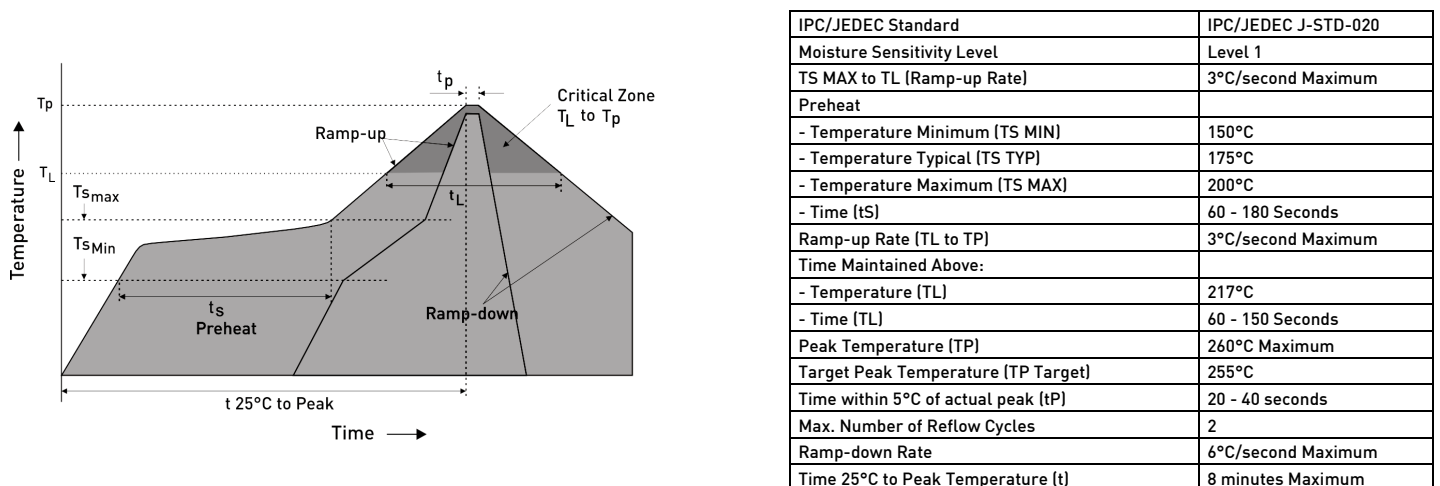

ORDERING INFORMATION

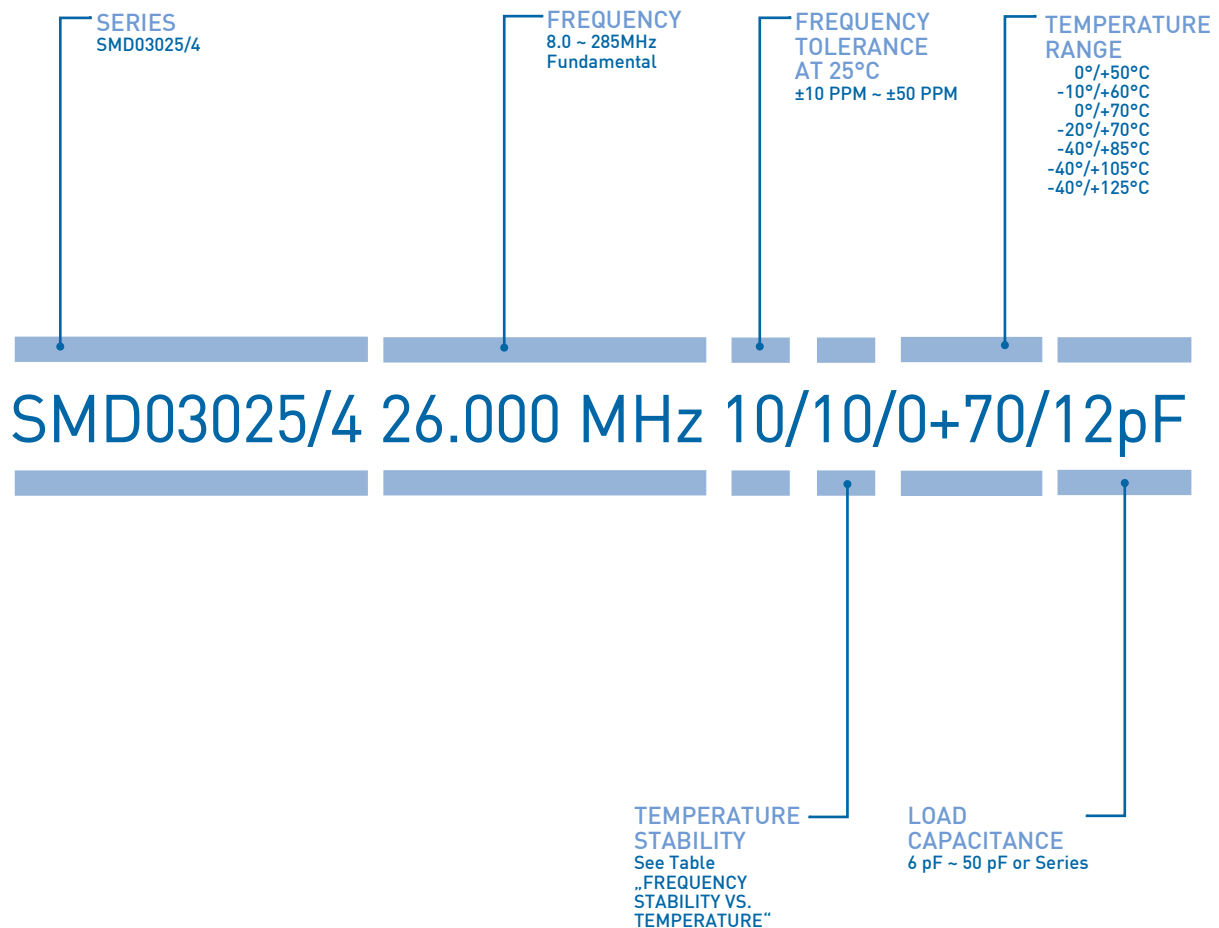

EXAMPLE: SMD03025/4 26.000 MHz 10/10/0+70/12pF
PLEASE INDICATE YOUR REQUIRED PARAMETERS



REVISION HISTORY

REVISION	RELEASE DATE	AMENDMENTS SUMMARY
00	MARCH 2015	+ Initial Data Sheet (SPEC 01/REV.00)
01	DECEMBER 2016	+ Revised load capacitance, shunt capacitance and drive level
02	DECEMBER 2017	+ Revised housing height
03	AUGUST 2023	+ Revised Frequency Range + Revised Shunt Capacitance + Revised Aging + Revised Frequency Stability vs. Temperature Table + Added list of Standard Frequencies



PREMIUM QUALITY BY PETERMANN-TECHNIK



OUR COMPANY IS CERTIFIED ACCORDING TO ISO 9001:2015 AND 14001:2015

THIS IS FOR YOU TO ENSURE THAT THE PRINCIPLES OF QUALITY MANAGEMENT ARE FULLY IMPLEMENTED IN OUR QM-SYSTEM AND QUALITY CONTROL METHODS .